

# ABS MUL HT<sup>†</sup>

CONCENTRATED EMULSIFIER FOR HIGH TEMPERATURE APPLICATIONS

## BENEFITS

- Performs at temperatures up to 450°F.
- Effective without the need for a secondary emulsifier package.
- Effective at low concentrations.

## APPLICATIONS

- Performs as part of the ABS 40 system and other invert emulsion drilling fluid systems.
- 1.0 gal/bbl (typical) for most applications.

## PROPERTIES

- Appearance: Dark amber liquid
- Specific Gravity: 0.93
- Flash Point: >250°F

## TREATMENT RECOMMENDATIONS


Typical concentrations of 1.0 gal/bbl are sufficient for most applications. ABS MUL HT mixes easily with minimal agitation.

## PACKAGING AND HANDLING

ABS MUL HT is available in 275 gallon totes. Handle ABS MUL HT as an industrial chemical, wearing protective equipment and observing precautions as described in the Safety Data Sheet (SDS).



AES DRILLING FLUIDS

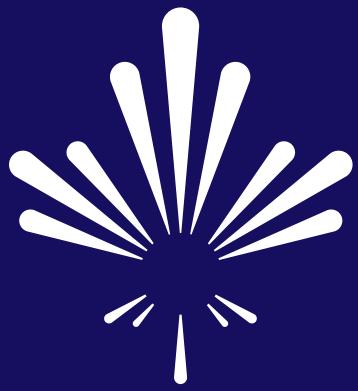

**AES DRILLING FLUIDS**

[www.aesfluids.com](http://www.aesfluids.com)

© 2024 AES Drilling Fluids. All rights reserved. The information provided is for informational purposes and is believed to be accurate, although this cannot be guaranteed. No guarantees or warranties are stated or implied. <sup>†</sup>Marks of AES Drilling Fluids, LLC.

Revision 1.01