

ABS MUL[†]

CONCENTRATED EMULSIFIER FOR SUPERIOR EMULSION STABILITY

BENEFITS

- Forms a stable emulsion and reduces fluid loss.
- In most applications, does not require a secondary emulsifier.

APPLICATIONS

- Performs as part of the ABS 40 system and other invert emulsion drilling fluid systems.
- 1.0 gal/bbl (typical) for most applications.

PROPERTIES

- Appearance: Dark amber liquid
- Specific Gravity: 0.97
- Flash Point: 230°F

TREATMENT RECOMMENDATIONS


Typical concentrations of 1.0 gal/bbl is sufficient for most applications. ABS MUL mixes easily with minimal agitation.

PACKAGING AND HANDLING

ABS MUL is available in 275 gallon totes. Handle ABS MUL as an industrial chemical, wearing protective equipment and observing precautions as described in the Safety Data Sheet (SDS).



AES DRILLING FLUIDS

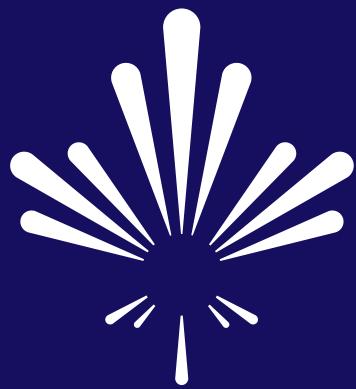

AES DRILLING FLUIDS

www.aesfluids.com

© 2024 AES Drilling Fluids. All rights reserved. The information provided is for informational purposes and is believed to be accurate, although this cannot be guaranteed. No guarantees or warranties are stated or implied. [†]Marks of AES Drilling Fluids, LLC.

Revision 1.01