

ENERWET[†]

LIQUID ADDITIVE USED TO OIL-WET SOLIDS

BENEFITS

- Preferentially oil-wets solids.
- Reduces rheology in the presence of high solids concentrations.
- Performs with ENERMUL⁺ and ENERSPERSE⁺ for optimum rheology and emulsion stability.

APPLICATIONS

- 1 gallon per 20 sacks of barite, barrel of cuttings generated, or as needed for lost circulation material added (typical).
- As needed lower rheology from excess solids.

PROPERTIES

- Appearance: Amber liquid
- Specific Gravity: 0.93 - 0.96
- Pour Point: -25°F

TREATMENT RECOMMENDATIONS

ENERWET is a liquid additive used to oil-wet solids in the EnerREACH system. Add 1 gallon of ENERWET for every 20 sacks of barite, 1 barrel of cuttings generated, or as required when adding lost circulation material.

ENERWET works in combination with ENERMUL to provide a stable emulsion with oil-wet solids. Maintain product concentration while drilling, monitoring overall drilling fluid properties for treatment requirements.

PACKAGING AND HANDLING


ENERWET is available in 275 gallon totes. Handle ENERWET as an industrial chemical, wearing protective equipment and observing precautions as described in the Safety Data Sheet (SDS).



ENERWET is a liquid added to the system while drilling or when adding weight material or lost circulation material



AES DRILLING FLUIDS

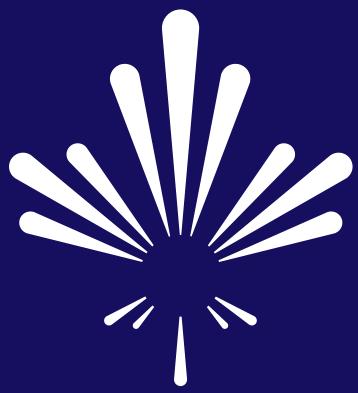

AES DRILLING FLUIDS

www.aesfluids.com

© 2024 AES Drilling Fluids. All rights reserved. The information provided is for informational purposes and is believed to be accurate, although this cannot be guaranteed. No guarantees or warranties are stated or implied. [†]Marks of AES Drilling Fluids, LLC.

Revision 1.01