

ENERZAN[†]

DISPERSIBLE DRY XANTHAN GUM

BENEFITS

- Shear thinning characteristics and low shear viscosity provides excellent carrying and suspension properties.
- Provides superior rheological properties for hole cleaning.
- Stable across a wide range of pH levels.

APPLICATIONS

- 0.2 - 2.0 lb/bbl (typical) for most applications.
- Add slowly through the hopper.
- Pilot testing will aid to determine the appropriate concentration for a specific scenario.

PROPERTIES

- Appearance: Tan powder
- Specific Gravity: 1.5 - 1.6

TREATMENT RECOMMENDATIONS

Add ENERZAN slowly through the hopper to minimize the risk of fisheyes. Typical concentrations between 0.2 to 2.0 lb/bbl are effective for most applications.


Pilot testing recommended to determine the appropriate concentration for a specific scenario.

PACKAGING AND HANDLING

ENERZAN is available in 25 and 55 lb sacks. Handle ENERZAN as an industrial chemical, wearing protective equipment and observing precautions as described in the Safety Data Sheet (SDS).



AES DRILLING FLUIDS

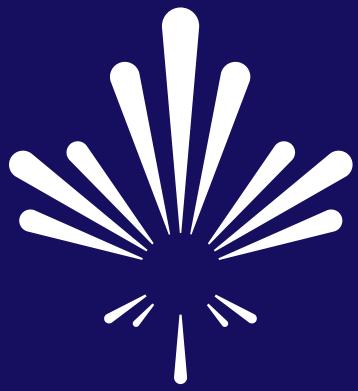

AES DRILLING FLUIDS

www.aesfluids.com

© 2024 AES Drilling Fluids. All rights reserved. The information provided is for informational purposes and is believed to be accurate, although this cannot be guaranteed. No guarantees or warranties are stated or implied. [†]Marks of AES Drilling Fluids, LLC.

Revision 1.01