

POLY PRO G[†]

PROPRIETARY BLEND OF GLYCOLS

BENEFITS

- Stabilizes reactive clay formations.
- Aids in torque reduction and minimizes bit balling.
- Improves fluid lubricity.

APPLICATIONS

- 2.0 - 5.0% v/v (typical) for most applications.
- Higher concentrations may be required for extreme conditions.
- Periodic treatments are necessary to maintain desired concentrations.

PROPERTIES

- Appearance: Yellow amber liquid
- Specific Gravity: 1.03 - 1.13
- Flash Point: > 400°F

TREATMENT RECOMMENDATIONS

Typical concentrations range between 2 to 5% by volume for most applications, although under extreme conditions higher concentrations may be required. Supplemental treatments are required to maintain a desired concentration.


PACKAGING AND HANDLING

POLYPRO G is available in bulk. Handle POLYPRO G as an industrial chemical, wearing protective equipment and observing precautions as described in the Safety Data Sheet (SDS).



POLYPRO G lubricity and shale inhibition additive.



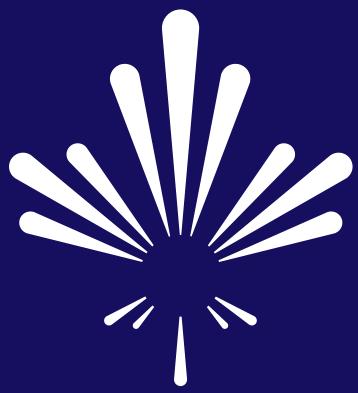

AES DRILLING FLUIDS

www.aesfluids.com

© 2024 AES Drilling Fluids. All rights reserved. The information provided is for informational purposes and is believed to be accurate, although this cannot be guaranteed. No guarantees or warranties are stated or implied. [†]Marks of AES Drilling Fluids, LLC.

Revision 1.01