

ENERBLACK[†]

LIQUID GILSONITE DISPERSION

BENEFITS

- Performs as a wellbore stabilizing agent through shale inhibition.
- Reduces filter cake build-up in depleted sands and micro-fractures, lowering overall fluid loss and differential sticking risk.
- Enhances lubricity.
- Effective up to 425°F.

APPLICATIONS

- 2 - 4 % v/v (typical) for most applications.
- Supplemental treatment recommended prior to encountering known trouble zones.
- Can be added directly to hopper or suction pit.

PROPERTIES

- Appearance: Black liquid
- Specific Gravity: 1.03 - 1.05
- Flash Point: 210°F


TREATMENT RECOMMENDATIONS

Typical concentrations of 2 to 4 percent by volume for most applications, although under extreme conditions higher concentrations may be required. ENERBLACK can be added directly through the hopper or in the suction pit.

PACKAGING AND HANDLING

ENERBLACK is available in 55 gallon drums and 275 gallon totes. Handle ENERBLACK as an industrial chemical, wearing protective equipment and observing precautions as described in the Safety Data Sheet (SDS).



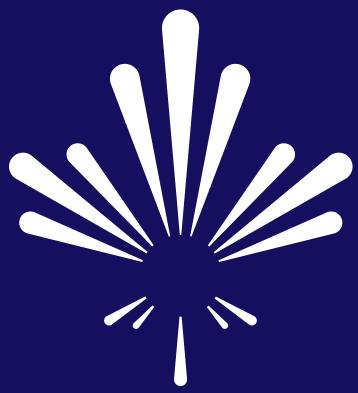

AES DRILLING FLUIDS

www.aesfluids.com

© 2024 AES Drilling Fluids. All rights reserved. The information provided is for informational purposes and is believed to be accurate, although this cannot be guaranteed. No guarantees or warranties are stated or implied. [†]Marks of AES Drilling Fluids, LLC.

Revision 1.01