

# PXL BLUE<sup>†</sup>

LOW MOLECULAR WEIGHT POLYACRYLAMIDE

## BENEFITS

- Effectively inhibits hydration and dispersion of clays.
- Provides lubricity and reduces bit and BHA balling.

## APPLICATIONS

- 0.25 - 1.5 lb/bbl to the active system (typical).
- Complements performance of biopolymers and starches.

## PROPERTIES

- Appearance: White powder
- Specific Gravity: 1.5

## TREATMENT RECOMMENDATIONS


Typical concentrations range from 0.25 to 1.5 lb/bbl. PXL BLUE works most effectively when used in conjunction with biopolymers and starches.

Pilot testing recommended to determine the appropriate concentration for a specific scenario.

## PACKAGING AND HANDLING

PXL BLUE is available in 30 lb sacks. Handle PXL BLUE as an industrial chemical, wearing protective equipment and observing precautions as described in the Safety Data Sheet (SDS).



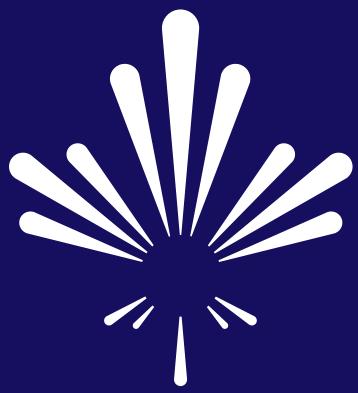

**AES DRILLING FLUIDS**

[www.aesfluids.com](http://www.aesfluids.com)

© 2024 AES Drilling Fluids. All rights reserved. The information provided is for informational purposes and is believed to be accurate, although this cannot be guaranteed. No guarantees or warranties are stated or implied. <sup>†</sup>Marks of AES Drilling Fluids, LLC.

Revision 1.01